

Xylon d.o.o.

Fallerovo setaliste 22
 10000 Zagreb, Croatia
 Phone: +385 1 368 00 26
 Fax: +385 1 365 51 67
 E-mail: support@logicbricks.com
 URL: www.logicbricks.com

Features

- Advanced object classification core for support of Vehicle Detection in camera-based video systems
- Algorithm based on a cascade of weak classifiers using Local Binary Pattern (LBP) features
- Trained for car and truck recognition on a wide range of automotive scenarios
- Run-time variable image size
- Supports resolutions up to 4096x4096
- Support for multiple scale detection
- Template size 24x24 pixels
- Run-time variable window shift
- Supports Xilinx® Zynq®-7000 All Programmable SoC
- ARM® AMBA® AXI4 compliant Memory Mapped Register Interface
- AXI4 Slave Stream Video Input Interface
- Support RGB and YUV video stream format
- High Input Data rate (> 125 Mpixels per Second)
- High Throughput (> 54 GOP/sec)
- Frame rate of 25 fps with multiple scales

Core Facts	
Provided with Core	
Documentation	User's Manual
Design File Formats	Encrypted VHDL
Verification	Reference design simulation
Reference Designs & Application Notes	Vivado reference design
Additional Items	SW drivers, API and post-processing library
Simulation Tool Used	
Vivado Simulator	
Support	
Support provided by Xylon	

- Detection range from 5 to 100 m
- Simple programming due to a small number of control registers
- Can be evaluated on Xylon logiADAK ADAS kit
- C code API and post-processing library available

Applications

- Driving Assistance Systems such as Adaptive Cruise Control and Forward Collision Warning
- Content Based Indexing
- Traffic Monitoring

Table 1: Example Implementation Statistics for Xilinx® FPGAs

Family (Device)	Fmax (MHz) ¹	LCs	Slices ² (FFs/ LUTs)	IOB	CMT	BRAM ³	DSP48A	DCM / CMT	GTx	Design Tools
	sysgen_clk									
Zynq®-7000 (XC7Z020-2)	250	~16,150	2,111 (4,283/6,671)	0	0	67	0	0	N/A	Vivado 2014.4

Notes:

1) The maximum pixel rate is a half of the Fmax

2) Including AXI4-lite interface and assuming configuration with default IP parameters, max image size = 1024x1024, max template size = 24x24

3) Number of RAMB18

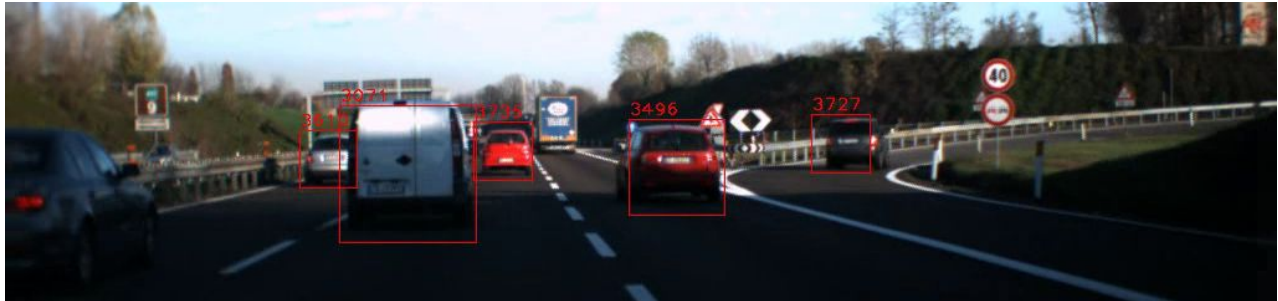


Figure 1: Vehicle Detection – Screenshot

General Description

The logiVDET is a learning-based vehicle detection IP core, developed for vision-based embedded applications, from the Xylon logicBRICKS IP core library. The algorithm follows a discriminative approach based on a cascaded classifier using Local Binary Pattern features. This architecture makes the detection process faster by rejecting the negative examples in the initial stages of the cascade, while the computation effort is mainly spent on the templates hard to classify.

Local Binary Pattern (LBP) is a very efficient texture operator which labels the pixels of an image by thresholding the neighborhood of each pixel and considers the result as a binary number. The most important property of the LBP operator in real-world applications is its robustness to monotonic gray-scale changes caused, for example, by illumination variations. Another important property is its computational simplicity, which makes it possible to analyze images in challenging real-time settings. LBP is being used as an alternative to Haar-like features in many domains.

The classifier was trained to recognize wide variety of rear views of cars and trucks on the basis of a wide training set of examples (Figure 2).




Figure 2: Example of vehicles used for the training set

The core itself works at a single scale, i.e. it recognizes vehicles at a fixed size. Extension to multiple scales is given by inserting the core in a framework that provides it with a sequence of re-scaled versions of the same input frame. This way, it is possible to detect vehicles in an arbitrary range of distances. For example, with 20 levels of scale (1 MPixel camera with 50 degrees of lens FOV) it is possible to detect vehicles in a range from 5 to 100 m running at 30 fps.

logiVDET is fully AXI4 compliant and supports Xilinx Zynq -7000 All Programmable SoC.

The IP core is provided with C code API and software library implementing post-processing task such as groping, tracking, distance estimation, and vehicle overlay. Calibration utilities are also available.

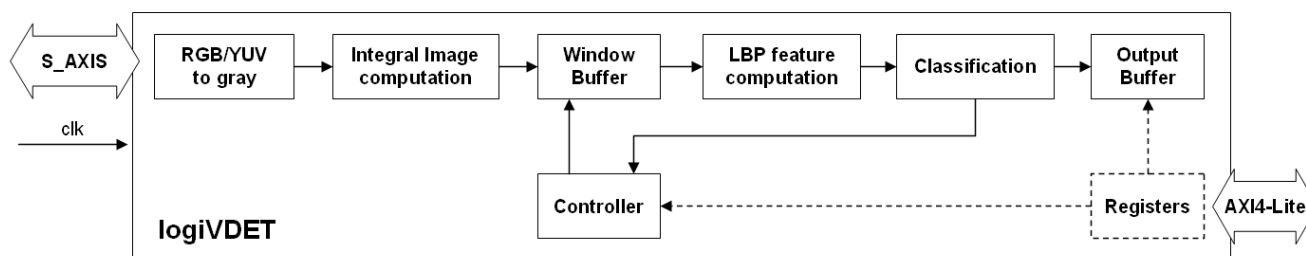


Figure 3: logiVDET Architecture

Functional Description

The Figure 3 presents internal logiVDET IP core's architecture. The logiVDET functional blocks are: RGB/YUV to Gray, Integral Image Computation, Controller, Window Buffer, LBP Feature Computation, Classification, Output Buffer and Registers.

RGB/YUV to Gray block

This optional block converts the input video stream from YUV4xx or 24-bit RGB888 format to Y8-bit (gray levels).

Integral Image Computation block

The Integral Image (or Summed Area Table) is used as a quick and effective way of calculating the sum of pixel values in a given rectangular region of the given image. Once the Integral Image is computed, you can calculate the summed area of any rectangular region with just few additions.

Controller block

This block is responsible of the overall execution flow. A FSM rules about the classification progress, the detection window sliding and the AXI4 Stream handshaking, on the basis of the results of the classification.

Window Buffer block

This block is used for buffering (in block rams) the Integral Image. The buffer is sequentially written and randomly read in order to calculate the summed areas necessary to the LBP feature computation.

LBP Feature Computation block

This block is responsible of the LBP feature computation. Three LBP feature computation engines works in parallel to maximize the throughput. Three features can be computed at each pixel clock cycle.

Classification block

For each stage this block checks the membership of the LBP features to the subsets, accumulates the weights and determines the prosecution of the classification process to the next stage.

Output Buffer block

This block queues in the buffer the detected vehicle coordinates. For each detection the scale index and the (x,y) position are memorized in the output buffer for each detection. At the end of the processing of all the scales of the sequence a flag is asserted in order to alert the CPU that the results are ready to be read out.

Registers block

The register interface can be configured as AXI4-Lite interface.

IP Configuration and Performances

The classifier parameters coming from the training, as well as the maximum size of the input image, can be updated at the compilation time. The length of the scale sequence, the sizes of the ROIs, and the step of the detection window at each scale can be programmed in software run-time.

The default IP configuration (related to the FPGA resource occupation in Table 1) includes 20 stages, 555 weak classifiers, a template size of 24x24 pixels and a maximum image width of 1024 pixels. With scale sequence of 18 ROIs, 1 MPixel camera and a 50 degrees of FOV lens, it is possible to detect vehicles in a range from 5 to 100 m and at a frame rate of 30 fps.

Software library

logiVDET IP core is provided with a software C code library optimized for the Zynq-7000 AP SoC including the post-processing functions such as vehicle grouping, vehicle tracking, vehicle distance estimation, diagnostic, vehicle overlay and display management. Software utilities for system calibration, configuration and PC-based emulation are also provided.

Core I/O Signals

Descriptions of all signals I/O are provided in Table 2.

Table 2: Core I/O Signals

Signal	Signal Direction	Description
Global Signals		
clk	Input	input processing clock
AXI4-Stream signals (slave bus)		
s_axis_tdata(23:0)	Input	Video Data: <ul style="list-style-type: none"> for 24-bit RGB input (RED [23:16] ; GREEN [15:8] ; BLUE [7:0]) for 16-bit YUV422 input type only 15:0 is in use (U/V [15:8] ; Y [7:0])
s_axis_tvalid	Input	Valid
s_axis_tuser	Input	Start Of Frame
s_axis_tlast	Input	End Of Line
s_axis_tready	Output	Ready
Register Interface		
AXI4-Lite Interface	BUS	Refer to AMBA AXI version 4 specification from ARM

Verification Methods

The logiVDET IP core is fully supported by Xilinx Vivado design tool. This tight integration tremendously shortens IP integration and verification. A full logiVDET implementation does not require any particular skills beyond general Xilinx tools knowledge. To learn more about this IP core, please visit:

<http://www.logicbricks.com/Products/logiVDET.aspx>

Recommended Design Experience

The user should have experience in the following areas:

- Xilinx design tools
- Xilinx System Generator for DSP (MathWorks Matlab/Simulink) to source model access

Available Support Products

The logiVDET can be fully evaluated on the logiADAK programmable development platform for upcoming advanced driver assistance (ADAS) applications that require intensive real-time video processing, parallel execution of multiple advanced algorithms and versatile interfacing with sensors and vehicle's communication backbones. The abundant performance and reprogrammability of the Zynq-7000 AP SoC device enables ADAS designers to design SoCs that outperform competing solutions and achieve a new level of system differentiation through a combination of hardware-accelerated video inputs from multiple camera inputs and the ability to quickly adapt to ever changing sensor setups and interfacing. To learn more about this product, please contact Xylon or visit our website:

Email: support@logicbricks.com
URL: <http://www.logicbricks.com/Products/logiADAK.aspx>

Ordering Information

This product is available directly from Xylon under the terms of the Xylon's IP License. Please visit our web shop or contact Xylon for pricing and additional information:

Email: sales@logicbricks.com
URL: www.logicbricks.com

This publication has been carefully checked for accuracy. However, Xylon does not assume any responsibility for the contents or use of any product described herein. Xylon reserves the right to make any changes to product without further notice. Our customers should ensure that they take appropriate action so that their use of our products does not infringe upon any patents. Xylon products are not intended for use in the life support applications. Use of the Xylon products in such appliances is prohibited without written Xylon approval.

Related Information

Xilinx Programmable Logic

For information on Xilinx programmable logic or development system software, contact your local Xilinx sales office, or:

Xilinx, Inc.
2100 Logic Drive
San Jose, CA 95124
Phone: +1 408-559-7778
Fax: +1 408-559-7114
URL: www.xilinx.com

Revision History

Version	Date	Note
1.00.a	03.01.2014	Initial datasheet release
2.0.1	24.11.2014	Vivado release
2.0.2	27.03.2015	Minor changes



The logiVDET core is sourced from Technology Partner
eVS embedded Vision Systems Srl.